

# Type SOW

## Industrial Motor Lead Cable


### 90°C, 600V

#### Construction

Stranded, annealed bare copper conductor, EPDM insulation, heavy-duty, oil-resistant thermoset jacket.

#### Applications

Designed for use as motor and power leads where flexibility and portability are required.

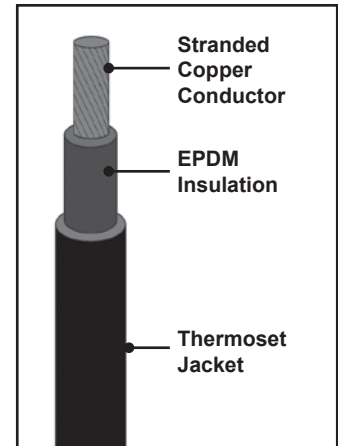

AWG	Stranding	Conductor O.D. (in)	Insulation Thickness (in)	Jacket Thickness (in)	Nominal O.D. (in)	Amps	Shipping Weight (lbs/M-ft)
16	26 x .01	.060	.030	.03	.186	13	25
14	41 x .01	.075	.045	.03	.233	18	48
12	65 x .01	.095	.045	.03	.253	25	51
10	104 x .01	.120	.045	.03	.278	30	66

*Information based on AIW specs.*

*See referenced page in the Hardware & Supplies section:*

#### Suggested Prep Tool

- Cable End Strippers  
2x2, 4x4 - I-9

For SDN® Flexible Control Cable see page 16 in the Instrumentation & Tray section

