


Spiral Configuration Custom Wire Assemblies

Quik-Pull Spiral is the most flexible custom cable on the market. It retains its roundness and does not change proportion when pulled through 90 degrees. Spiral assembly of building/fixture wire, factory bound, UL labeled and shipped on pull-length reels. Conductors numbered approximately every 1-1/2".

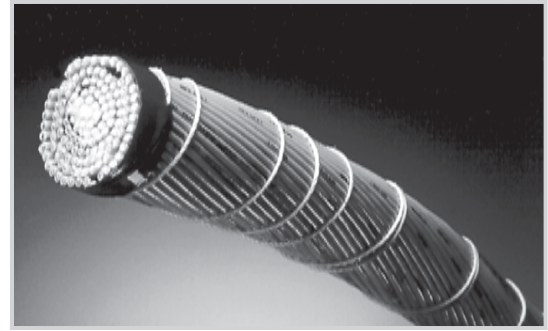

Applications

- For long pulls in conduit where all the conductors will be carried end-to-end.
- Where minimum outside diameter and maximum flexibility are needed.
- Where the overall assembly is to be jacketed.

**ORIGINAL, TRUE
SPIRAL CABLE**

Specifications

Conductors	Solid or stranded, bare copper per customer specification. Spiral configuration can be constructed from most single conductor wires, 10 AWG to 18 AWG. Conductor sizes can be mixed in an assembly. Maximum O.D. capability is 1-1/2".
Insulation	As required by the conductor designation, e.g. MTW, THHN, TFFN, XHHW. Specification for conductors used will be furnished on request.
Conductor ID	Alpha-numeric characters, words or sentences. Standard sequential number coding. Colors, striping and other alpha-numeric coding available.
Listing	UL Listed Processed Wires. E76139.
Cabling	Unilay construction for flexible finished cable with overall nylon binder thread.
Binder	Two flat, waxed 5040-denier nylon threads, spaced 1" apart, are wrapped around the entire assembly in the same direction. The waxed binder adheres to the assembly, staying in place while pulling through conduit. Alternative binding and taping are available.
Footage	Sequential footage marker under outer binder thread.
Packaging	No-charge, non-returnable wooden reels. Reel tag contains type, size and beginning and ending sequential footage numbers.

Need a jacketed cable assembly? No problem. Quik-Pull can put a PE or PVC jacket on your custom spiral configuration assembly. We can also do colors.

Tray rated available.