

Twisted Pair, Shielded

Each Pair Individually Shielded


NEC® Type CM.

Specifications

Conductors	Stranded, tinned copper
Insulation	PVC
Shield	Overall Mylar/aluminum foil tape with a stranded, tinned copper drain wire on each pair
Jacket	Gray PVC

Applications

Intercom systems, computer interconnects.

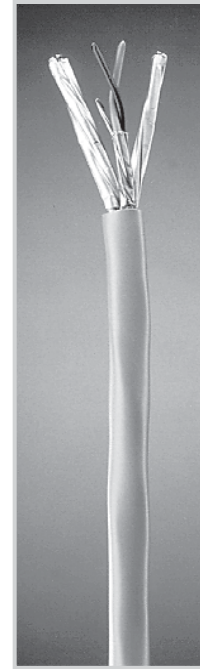

Part No.	No. of Pairs	AWG	Cond. Stranding	Nom. Ins. Thick. (in)	Nom. Jacket Thick. (in)	Nom. O.D. (in)	Weight (lbs/M-ft)
2P22T7EPS	2	22	7/30	.010	.045	.190	42
3P22T7EPS	3	22	7/30	.010	.045	.295	53
6P22T7EPS	6	22	7/30	.010	.045	.375	87
9P22T7EPS	9	22	7/30	.010	.045	.430	113
11P22T7EPS	11	22	7/30	.010	.045	.465	130
12P22T7EPS	12	22	7/30	.010	.045	.480	143
15P22T7EPS	15	22	7/30	.010	.060	.565	187
19P22T7EPS	19	22	7/30	.010	.060	.620	234
27P22T7EPS	27	22	7/30	.010	.060	.709	346
3P20T10EPS	3	20	10/30	.013	.045	.340	57
6P20T10EPS	6	20	10/30	.013	.045	.435	101
9P20T10EPS	9	20	10/30	.013	.060	.550	148
12P20T10EPS	12	20	10/30	.013	.060	.617	188
15P20T10EPS	15	20	10/30	.013	.060	.689	253
3P18T16EPS	3	18	16/30	.016	.045	.404	79
6P18T16EPS	6	18	16/30	.016	.045	.495	166
9P18T16EPS	9	18	16/30	.016	.060	.655	232
12P18T16EPS	12	18	16/30	.016	.070	.735	312
15P18T16EPS	15	18	16/30	.016	.070	.819	373

Some air plenum designs also stocked.

See referenced pages in the Hardware & Supplies section:

Installation Hardware

- Acme 25A, 37A or 75A Staple Gun - I-3

Suggested Prep Tool

- 721 Multi-Wire Stripper/Cutter - I-9